

MAXHUB XCore Room Kit for Microsoft Teams Rooms

Model: XT10-VB Kit

MAXHUB XT10-VB Kit showcases its versatility with the addition of an exceptional Videobar. Designed with simplified front-line one-cable deployment and remarkable expandability, this bundle effortlessly accommodates the evolving needs of multiple devices. Compatible with Microsoft Teams Rooms, the Kit also helps to facilitate the switch to Microsoft Teams Rooms smart spaces for BYOD scenarios, enhancing Teams-native audio and video experiences while accommodating cost-balance needs.



One Cable Technology



Device Management



Flexible & Ease of Installation



Easy Content Sharing



3-Year Warranty & Local support



Secured and Managed

Package Includes


• XC13T Mini-PC	×1
• TCP20T Touch Control Panel	×1
• UC S07	×1

Package Physical Specifications

• Package dimension (L*W*H)	705 × 440 × 265 mm
• Net Weight	3.29 kg / 7.25 lbs
• Gross Weight	11.49 kg

Environmental Conditions	
Operation Temperature	0°-40°C / 0°F-104°F
Operation Humidity	10%~90% RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%~90% RH
Altitude	Below 5000 m/ 16404 ft

Connection

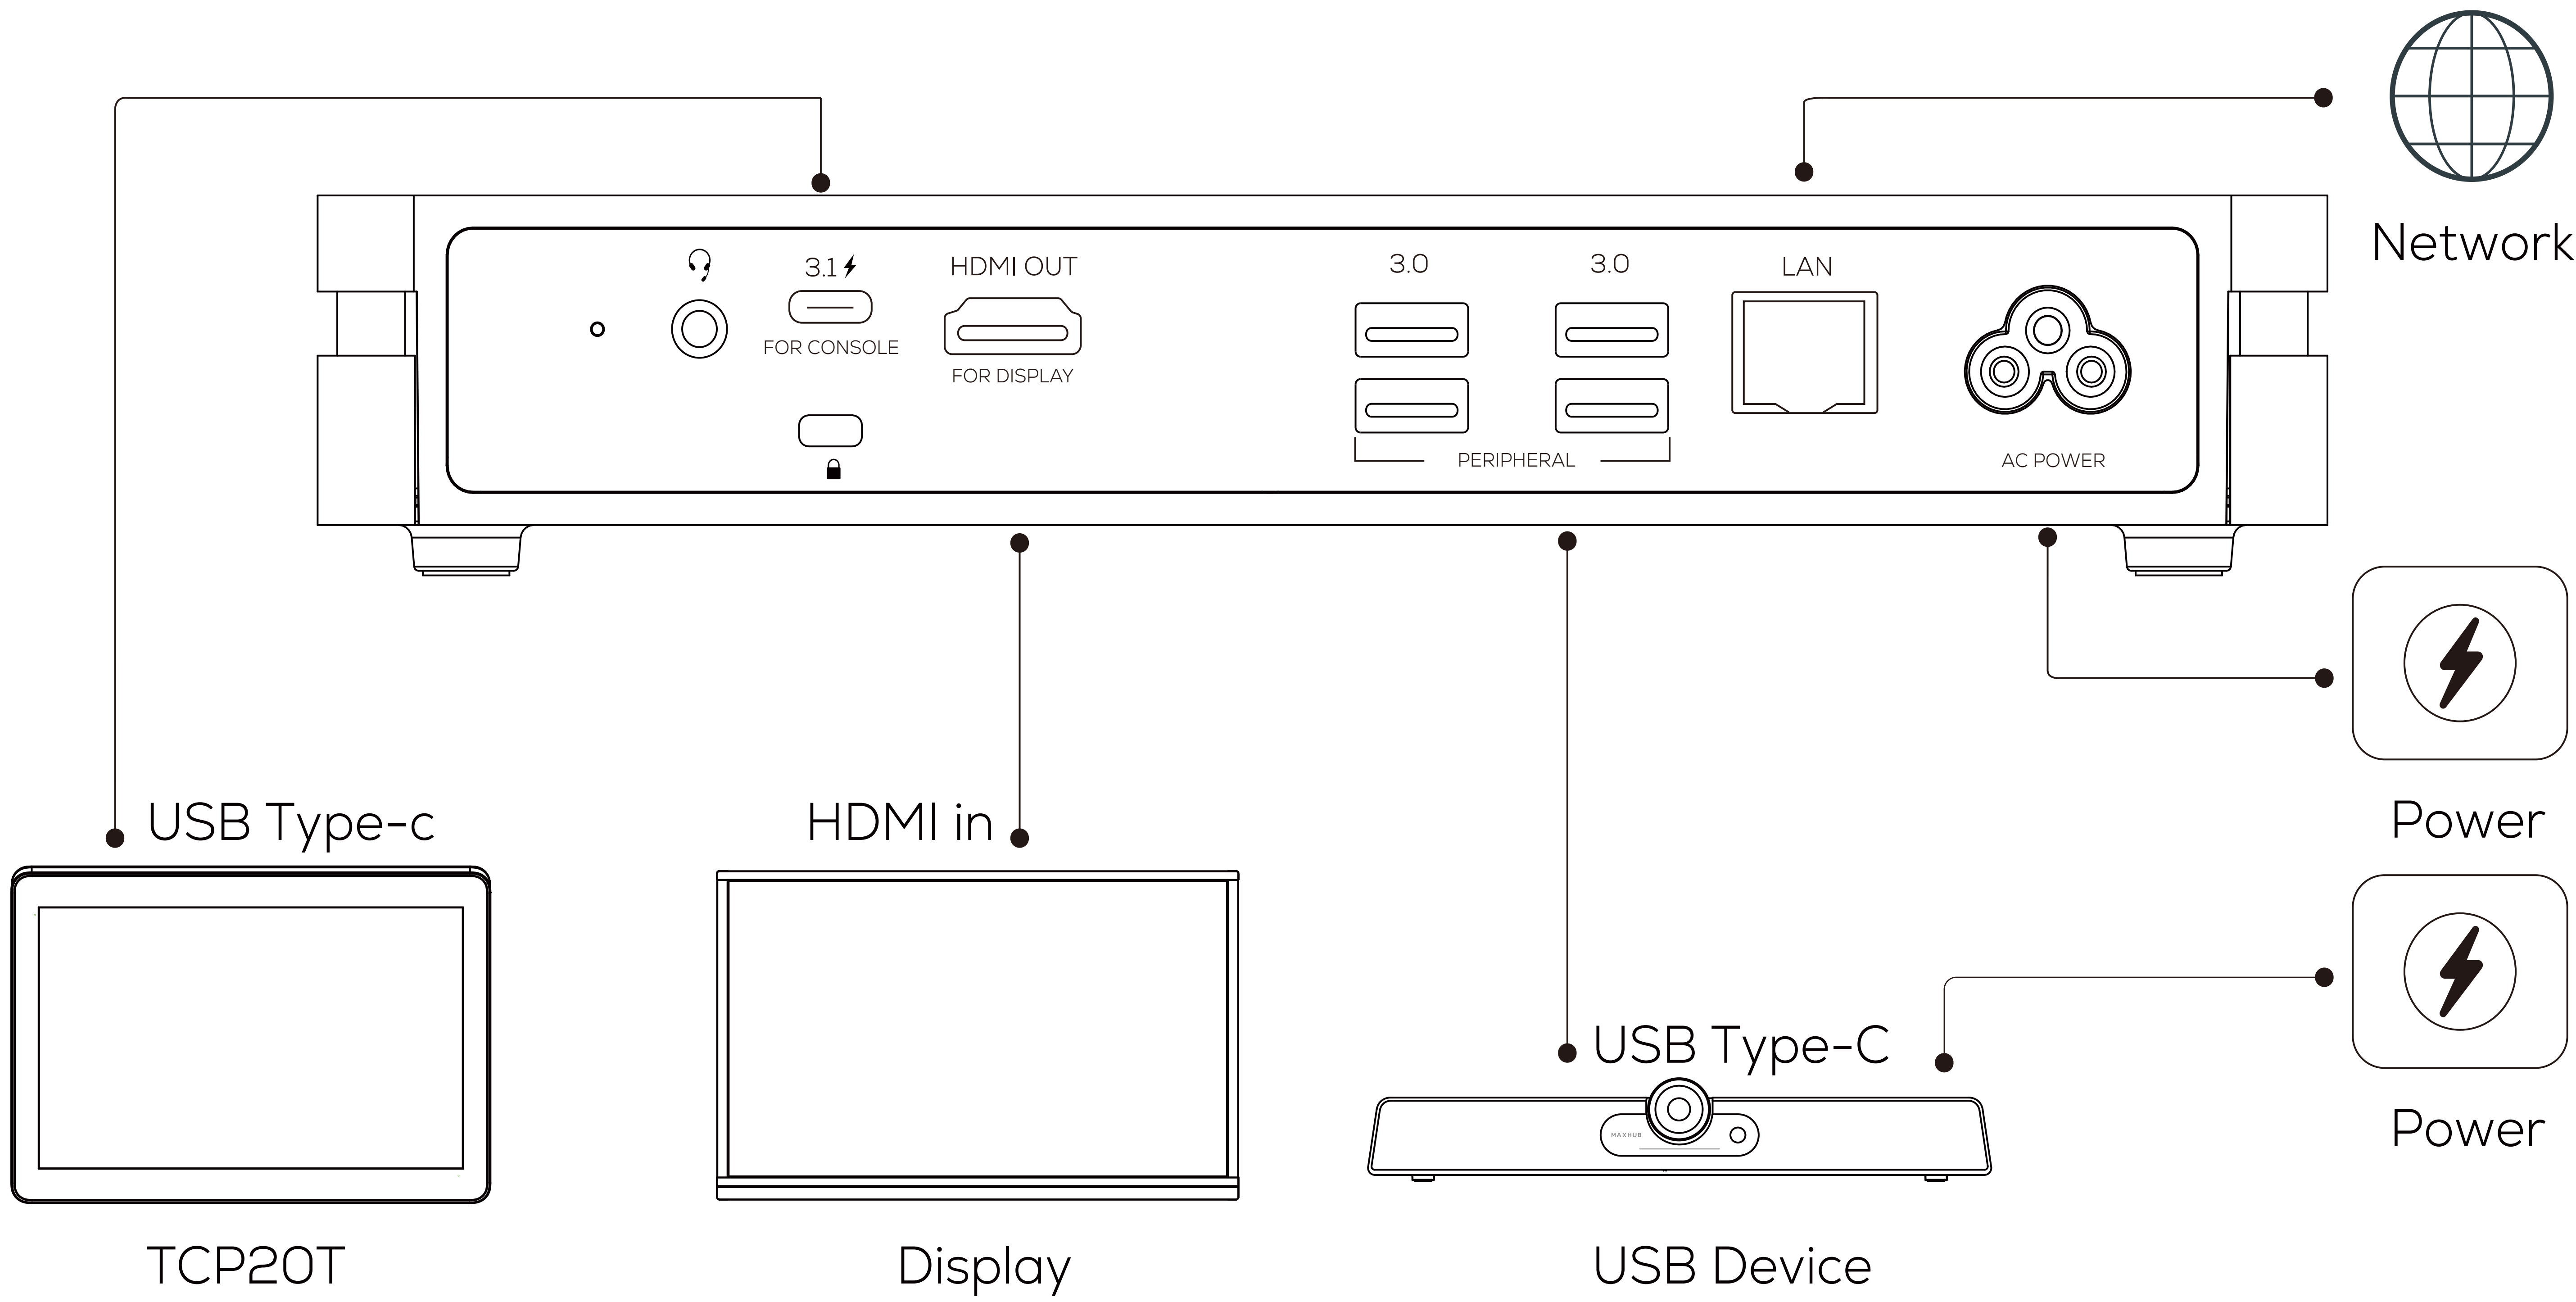

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.

XC13T Mini-PC

Product Specification	
Type	Mini-PC
CPU	12th Gen intel i3
Memory	8GB DDR4 3200MHz SO-DIMM x 2
Storage	128GB SATA SSD (M.2-2280 SATA3 up to 6Gb/s)
Graphics	Intel® UHD Graphics for 12th Gen Intel® Processors;
Network	1000Mbps RJ45
Operating System	Windows 11 IoT Enterprise SAC
Application	Microsoft Teams Room

I/O Port	
USB-A 3.0	4
LAN	1
USB-C (For Teams Rooms Console)	1
HDMI Out	1
Audio Out	1
AC Power	1
Kensington Lock Slot	1

Power	
Power Supply Mode	AC Power
Power Requirements	100-240V AC 50/60 Hz
Max Power	90W

Accessories (included in the package)	
Wall Bracket	×1
PC Bracket	×1
Cable Cover	×1
HDMI Cable (1.8 m / 5.9 ft)	×1
Power Cord (1.8 m / 5.9 ft)	×1
Quick Start Guide	×1

Physical Specification	
Product Demension	230 × 185 × 41.5 mm / 9.06 x 7.28 x 1.63 in
Product Weight	1.36 kg / 3 lbs

Touch Control Panel TCP20T

Display	
Size	10.1 inch
Resolution	1920 (H) × 1200 (V)
Frequency Refresh Rate	60 Hz
Back Light Unit	ELED
Brightness with Glass	Min.250cd/m², Typ.300cd/m²
Life Time	≥ 20000 Hours

Touch System	
Type	Capacitive touch
Surface Treatment	Anti-fingerprint, Anti-glare

I/O Port	
HDMI In (Content Sharing)	1
USB-A 2.0 (For USB Audio Peripherals, Keyboard, Mouse only)	1
USB-C 3.1 (For Connection to XC13T Mini-PC)	1
Audio Out (Headphone ,w/o Mic)	1

Sensor	
Motion Sensor	PIR sensor for auto wake-up

Accessories (included in the package)	
USB Type-C Cable (Type C-C) 5 m / 16.4 ft	×1
HDMI Cable (1.8m / 5.9ft)	×1
Quick Start Guide	×1

Physical Specification	
Product Demension	245 × 164.3 × 77.4 mm / 9.65 x 6.47 x 3.05 inch
Product Weight	0.88 kg / 1.94 lbs

VideoBar UC S07

Camera				Audio		
Pixel		12M		Speaker		
Sensor		1/2.3-inch 12MP Sony sensor		Sound Chanel		
Resolution and Frame Rate				Output Power		
H.264/MJPEG	(1) 3840 x 2160	(2) 2560 x 1440	(3) 1920 x 1080	Maximum Sound Pressure		
	(4) 1280 x 720	(5) 1024 x 576	(6) 960 x 540	Signal to Noise Ratio		
	(7) 800 x 600	(8) 640 x 480	(9) 640 x 360	Frequency Range		
	(10) 480 x 270	(11) 352 x 288	(12) 320 x 240	Microphone		
				Microphone Quantity		
YUY2	(1) 640 x 480	(2) 640 x 360	(3) 480 x 270	Voice Pickup Range		
	(4) 352 x 288	(5) 320 x 240	(6) 320 x 180	Microphone Frequency Range		
	(7) 160 x 120			Special Features		
ZOOM		5x Digital Zoom		Noise Reduction, Echo Cancellation, Anti-Reverberation, Built-in AGC Algorithm		
Output Format		MJPEG; YUY2; H.264				
Field Of View		120° (D)				
Adjustable Angle		± 15° (V)				
Focus Mode		Fixed-Focus				
Focus Distance		1m		Input/Output Port		
Special Features	Auto Framing: automatic adjustment FOV to fit in all participants					
	Speaker Tracking: voice triggered people tracking					
	10 Zooming Pre-sets for instant setting up					
Power				Compatibility		
Power Requirements		12V		Support major VC software including ZOOM, Microsoft® Teams, Google Meet, Google Hangouts, Cisco WebEx®, RingCentral, etc.		
Overall Power(Max.)		10W				
PoE Power		Yes (IEEE 802.3af or 802.3at)				
System Requirements		Supports Windows XP/7/8.1/10/11, Android 8.1 or higher, and MAC OS 10.12 or higher				
Application Supported		MAXHUB Align software for Windows & Mac OS				
Mount		Wall-mounted TV mount kit (Optional)				
Physical Specifications				Environmental Condition		
Dimension (L × H × D)		466 × 76 × 93 mm (18.2 × 3.0 × 3.7 inch)		Operation Temperature		
Dimension (Package) (L × H × D)		1pcs 538 × 160 × 169 mm		Operation Humidity		
		(21.2 × 6.3 × 6.7 inch)		Storage Temperature		
Net Weight		1.05 kg / 2.31 lbs		Storage Humidity		
Gross Weight		1pcs 2.55 kg / 5.62 lbs		Altitude		
Warranty		3 year hot swap		Accessories: one year		
What's In The Box						
included		1 x USB C-A Cable (1.8 m / 5.9 ft), 1 x Remote Control				
		1 × Power Adapter, 1 × Wall-mounted Components, 1 × Camera Privacy Cover				

