

MODEL AL-125



FOR UP TO 56.7 KG

- Lift Extends 66 cm Upwards
- Maximum Weight: 56.7 kg

Model AL-125 is the perfect solution for unused and wasted space within your built-in cabinetry. Designed for easy installation, this mechanism allows you to create an enclosure in any shape to conceal kitchen appliances or other valuables. At the push of a button, a concealed cabinet will raise from your cabinetry, providing a new level of convenience and space-efficiency within your kitchen. This model is most often used in the “dead corner” of L-shaped countertops.

- Industry-Leading Reliability
- Near Silent Operation
- Popular for Kitchen “Dead Corners” and in Custom Closets




All Nexus products are shipped in custom-made protective packaging, and they include everything you need to mount and operate them. The products are designed for easy assembly, and simple instructions with photos are included.

MODEL AL-125

TECHNICAL SPECIFICATIONS

- 56.7 kg total lift capacity (including enclosure box and its contents)
- Travels 66 cm
- No exposed tracks, gears or scissors
- UL recognized
- Draws 3.5 Amps @ 110V and 1.75 Amps @ 220V at max thrust
- Speed 3.8 cm per sec. (only 17 sec. to fully raise)
- Quiet - runs at just 45 dB
- Screw-driven mechanism
- Steel construction
- Your choice of RF remote or Control System Integration Kit (CSI Kit includes IR remote and contact closure interface)
- Collision detection provides stop and reverse on impact
- "Soft Start" and "Soft Stop" for smooth ride
- Power is Available in These Formats:
USA, 110V / Europe, 230V / Japan, 100V
Australia, 240V / UK, 230V

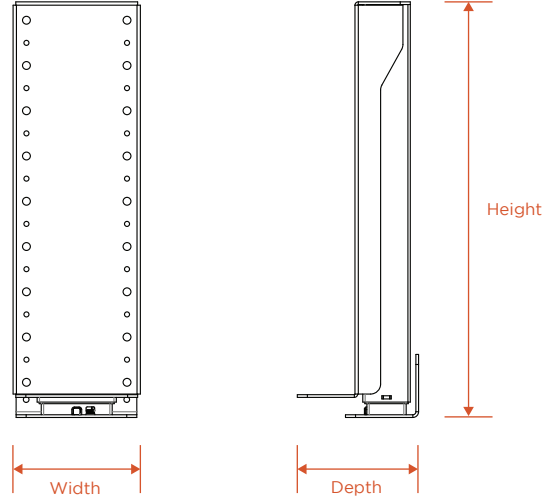

Height: 52.6 cm
Width: 16 cm
Depth: 15.2 cm

WHAT'S IN THE BOX

- Motorized lift column (the motorized unit is pre-assembled and ready to use)
- Heavy duty load support bracket
- Base plate and upper back mounting bracket
- Ball bearing sliders for vertical stabilization
- Control box with power cord
- Remote control and receiver (your choice of RF or CSI Kit*)
- Wired control switch
- Cord control wrap
- All hardware for assembly and mounting
- Full assembly instructions with photos



CONTROL OPTIONS

Your choice of RF remote or Control System Integration Kit (CSI Kit*). Wired button pad included with both.



*CSI Kit includes IR remote and contact closure interface

INSTALLATION TIPS

- Tip #1** Install a rubber gasket to the counter lip on under counter lifts to prevent damage from spills
- Tip #2** Install motion sensor lighting to the inside of the box for aesthetics and ease of use
- Tip #3** Install power outlets to the inside of the box for convenience when using appliances

Contact us for more helpful hints!