MODEL L-75ix DIAGRAM PRIMARY CABINET DIMENSIONS

SPECIFICATIONS (CENTIMETERS ARE REPRESENTED BY [])

MAX TV SIZE: 75"

MAX WEIGHT CAPACITY: 100 LBS [45.4 KG] LIFT MECHANISM WEIGHT: 129 LBS [58.5 KG] MAX TRAVEL (EXTENSION) : 52" [132.1]

LIFT SYSTEM HEIGHT: 33.5, [85.1] TO 45.125, [114.6] MAX TV HEIGHT: 44.375' [112.7] MINUS LID THICKNESS

MOTORIZED SWIVEL RANGE: +/- 180°


QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)


TV DIMENSIONS: W____, H____, D____

MIN. INTERIOR CABINET WIDTH : W+2" [5.1] = _____ OR 38" [96.5]

MIN. INTERIOR CABINET HEIGHT: $\frac{H+2"}{(CANNOT EXCEED 45.25"}$ [85.4]

MIN. INTERIOR CABINET DEPTH
MIN. LID CUTOUT DEPTH: D+10" [25.4] = _____

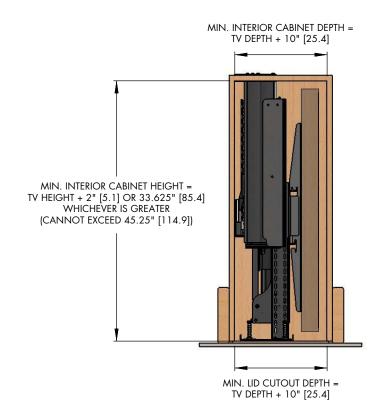

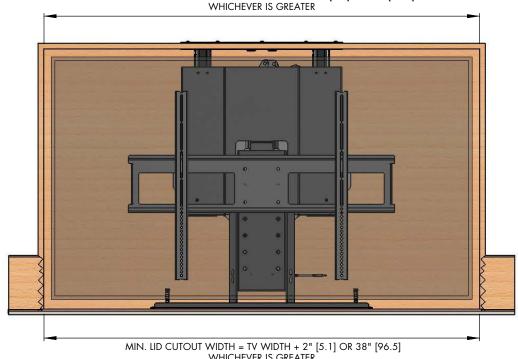

MIN. INTERIOR CABINET WIDTH = TV WIDTH + 2" [5.1] OR 38" [96.5]


WHICHEVER IS GREATER

NOTES:

- 1. NEXUS 21 RECOMMENDS THIS INSTALLATION BE COMPLETED BY A LICENSED CONTRACTOR
- 2. ALL DIMENSIONS SHOWN IN INCHES WITH CENTIMETERS SHOWN IN []
- 3. THE BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
- 4. FOR REFERENCE DIMENSIONS, SEE PAGE 2 OF THIS DIAGRAM
- 5. WHEN DETERMINING TV HEIGHT. ALWAYS USE MANUFACTURER SUPPLIED "TV WITHOUT STAND" HEIGHT
- 6. LIFT MECHANISM IS POWDERCOATED BLACK STEEL. COLORS IN DIAGRAM ARE FOR CLARITY ONLY.



MODEL L-75ix DIAGRAM REFERENCE CABINET DIMENSIONS

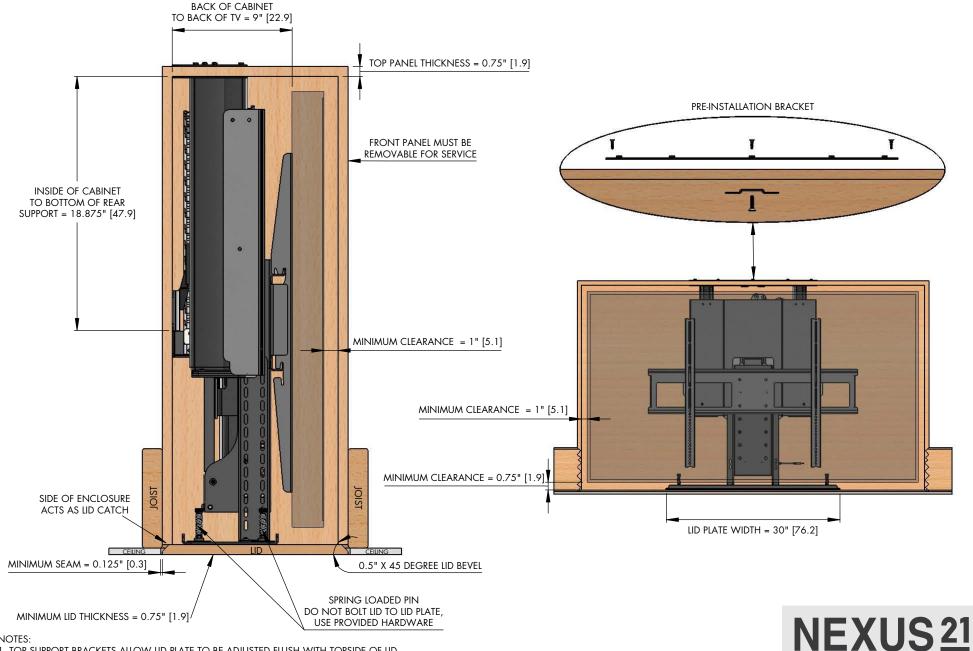


NOTES:

- 1. TOP SUPPORT BRACKETS ALLOW LID PLATE TO BE ADJUSTED FLUSH WITH TOPSIDE OF LID
- 2. LID IS DESIGNED TO FLOAT WITH PROVIDED SPRING LOADED PINS LID MUST BE INSTALLED PROPERLY FOR SAFETY

COPYRIGHT 2019 - ALL RIGHTS RESERVED UPDATED 10/30/19

MODEL L-75ix DIAGRAM LIFT IN MOTION

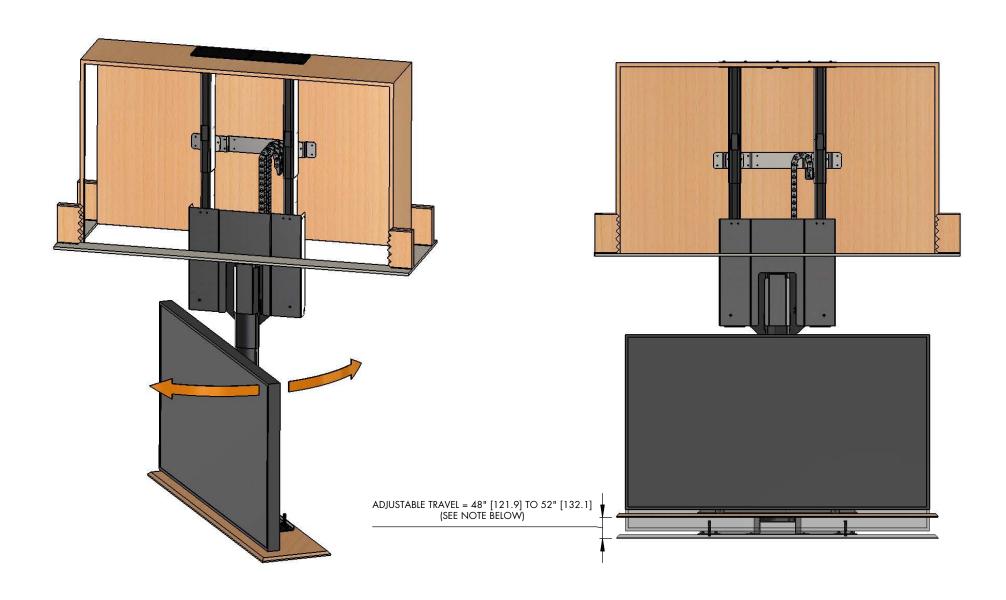



1. HEIGHT LIMIT INSERT IS USED TO REDUCE THE TRAVEL BY UP TO 48" [121.9] WITH THE MAX TRAVEL BEING 52" [132.1]

